

PLUMBING & TAPWARE

IMPORTANT - Connections to plumbing should always be done by a licensed plumber. Fit supplied basket wastes to sink bowls. Install tapware according to manufacturer's instructions.



It is essential that the installation is waterproof and carried out in accordance with these instructions. Oliveri Solutions will not be held responsible for any damage caused by leakage or faulty installation.

CARE INSTRUCTIONS FOR YOUR GRANITE SINK

AVOID CONTACT WITH HARSH CHEMICALS AND HOT SURFACES

Do not clean using harsh abrasives! Rinse and dry your sink daily.

GENERAL CARE & REGULAR MAINTENANCE:

- Clean daily with warm water, liquid detergent and a soft cloth. Rinse thoroughly and towel dry.
- Abrasive cleaning powders or creams should not be used, nor chemically aggressive cleaning agents.
- General stains should be removed immediately.
- Marks caused by foods or liquid which stain easily, eg. tea, coffee, fruit juice and the like, must be removed immediately with very hot water and a cleaning product.
- Special stains, such as those caused by Indian ink, oil-based stains or paints, must be removed immediately. If these stains are difficult to remove, use a cloth dampened with denatured alcohol.
- For organic stains which are especially difficult to remove, it is recommended that you fill the sink with a highly diluted organic cleaner such as bleach and let stand overnight. The next morning, rinse with warm water and a soft cloth. Alternatively a soft brush (eg. old tooth brush) and a mild cream cleaner can be used - but only with light pressure so as not to damage the surface finish.

IMPORTANT PRODUCT CARE INFORMATION:

- Avoid placing pots, pans or other hot objects in excess of 280°C on the surface of the sink. (CAUTION! The bottom of a pot or pan just removed from a stove top burner can reach temperatures of over 600°C).
- Pots, pans and other hot objects must be placed on appropriate potholders (made of wood, rubber, or other suitable material). Avoid causing excessive thermal shock due to the presence of very hot and very cold objects on the sink at the same time.
- Do not use the sink as a cutting surface: rather, use a cutting board made of hardwood or polyethylene, which can be purchased together with the sink.
- The use of stainless steel dish baskets or surface protectors (which can be purchased together with the sink) can reduce the risk of accidental damage.
- Do not use abrasive substances or metal cleaning pads (steel wool) to clean the sink because they scratch the surface, making it susceptible to stains.
- Heavy or pointed objects that fall on the surface of the sink can damage it.
- CAUTION! Do not pour alcohol, gasoline, trichloroacetic acid or any other solvents into or onto the sink because they could react with the chemical structure of the sink and damage it beyond repair.

Oliveri Solutions Pty Ltd

51 Naweena Rd, Regency Park SA 5010 Phone: +61 8 8348 6444 Email: sales@oliveri.com.au

INSTALLER - PLEASE READ & FOLLOW THESE INSTALLATION INSTRUCTIONS

FOR GRANITE SINKS

Please retain for owner as care instructions are included.



CHECK MODEL

The model number on the sink packaging must match the model of sink the customer ordered. Do not install if incorrect.



CHECK CONDITION OF THE SINK

Inspect the sink for any visible defects. **Do not install the sink if defects are found.** Contact your sink retailer/point of purchase.



AVOID CUTS

The perimeter and any cut-outs on the sink may contain sharp edges. Wear PPE and handle the sink carefully to avoid personal injury.



AVOID BREAKAGES

Granite sinks can be scratched or broken if proper care is not taken during installation.



CLAIMS FOR DAMAGE WILL NOT BE ACCEPTED AFTER INSTALLATION.

IT IS HIGHLY RECOMMENDED THE ACTUAL SINK BE PRESENT WHEN THE COUNTER/BENCHTOP IS CUT OUT AS A REFERENCE FOR ACCURACY

WARNING

Manufactured stone products do not present a health hazard themselves, however, the process of cutting, drilling or grinding can release silica dust particles which if inhaled can be very hazardous to your health and cause SILICOSIS.

DRILLING, CUTTING OR GRINDING ENGINEERED STONE PRODUCTS IS PROHIBITED.

Modification of Oliveri's Granite Sinks in any way will void warranty.

WASTE DISPOSAL UNITS

Waste disposal units can be fitted to Oliveri's Granite Sinks. However, faulty or damaged waste disposal units can cause vibration, which may lead to sink damage and will void warranty.

Download cut out files (PDF, DWG or DXF) from oliveri.com.au


Any advice, recommendation, information, assistance or service provided by Oliveri Solutions in relation to goods manufactured by it or their use and installation, is given in good faith and is believed by Oliveri Solutions to be appropriate and reliable. However, any advice, recommendation, information, assistance or service is provided by Oliveri Solutions without responsibility or liability.

FOLLOW THESE STEPS TO INSTALL AN OLIVERI GRANITE SINK

IF COUNTER / BENCHTOP IS SUPPLIED WITH CUT-OUT, SKIP STEPS MARKED WITH*

CHECK SPACE

Ensure there is adequate space for tapware (including a splashback if specified). Check space for installation (underneath) and operation (above). Particular care must be taken when a thick splash back is used (it may interfere with tapware location and operation). Ensure the cabinet will not foul the sink mounting flange or basins.



TEMPLATE *

Cut-out templates for your Oliveri sink are available online at oliveri.com.au. Use the product model number to find the template. Some sink templates apply to both left-hand and right-hand models. Ensure template is the correct way around for your model.



MARK CUT OUT *

Carefully mark out the template (or follow drawing instructions) making allowance for any additional polishing back that is required after cutting. **NOTE: The template is the exact finished cut-out size required.**




CUT & FINISH HOLE *

Drill pilot holes to accept an appropriate cutting tool for the counter/benchtop material (wear suitable personal protection equipment). Cut inside the mark, allowing sufficient material for any sanding and polishing back if required. **NOTE: Accuracy of the cutout shape is essential to ensure visual alignment with the bowl / basin perimeter and so any accessories fit correctly.**



TRIAL FIT THE SINK

Carefully position the sink against counter/benchtop to make sure it fits the cut-out correctly. If the fit is not correct, remove the sink and proceed with remedial work. Perform another trial fit after corrections have been made.



APPLY SEALANT

Oliveri recommends using the sealant strip (supplied with the sink), to seal between the sink and the benchtop. However, if silicone is used, it MUST be a "Neutral Cure" product – the use of "Acetic Cure" silicone can damage or discolour the sink and will void warranty.



BASKET WASTE & OVERFLOW INSTALLATION

After the sink is installed, fit the basket waste into the hole in the sink and attach the appropriate (regular or overflowed) drain body from under the bowl.

DO NOT USE SILICON ADHESIVE. Fasten basket waste to the drain using the screw provided. Do not overtighten. For overflowed sinks, install the overflow grate through the bowl cut-out and connect the overflow pipe to the overflowed basket waste drain.




DO NOT INSTALL USING EPOXY ADHESIVES

Should a genuine warranty claim arise for a sink installed using this method, Oliveri will cover the replacement cost of the sink only and not the cost of sink removal or reinstallation. **If you have any doubts, confirm the correct mounting method for your material by consulting the counter/benchtop supplier.**

TOPMOUNT INSTALLATION

The special seal (1) should be placed carefully onto the upper surface of the benchtop, on the edge of the cut out. Press down on it lightly so that it sticks to the surface. Carefully lower the sink into the cut out and onto the seal. Fasten the mounting brackets (4) to the sink from below as shown, using the screws provided. Then tighten the mounting bracket with a screwdriver, making sure that the sink is pulled down towards the benchtop and compresses the seal (1).


NOTE: Do not overtighten the mounting bracket screws. Once the sink is installed, carefully trim any excess seal from around the perimeter of the sink.

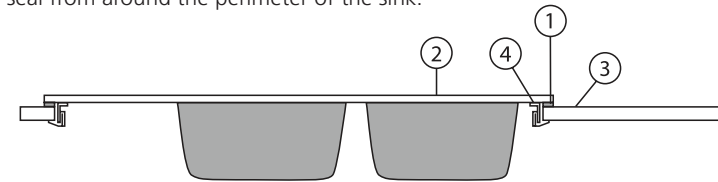

1. Special seal
2. Sink
3. Countertop
4. Mounting bracket suitable for countertop of thickness from 30mm to 40mm.

UNDERMOUNT INSTALLATION

Apply the special seal around the upper edge of the sink surface. Carefully bolt the sink to the underside of the benchtop using the "Molly" assemblies. Care must be taken during drilling and tightening to avoid cracking the benchtop or sink.

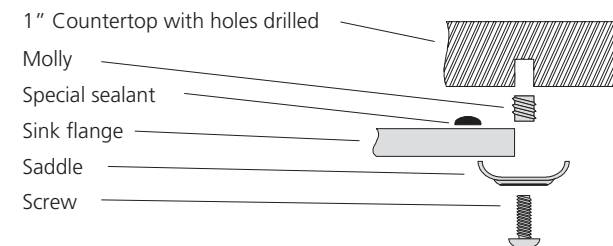

If you have any doubts, confirm the correct mounting method for your benchtop material by consulting the benchtop supplier.

Oliveri