

This Oliveri basin is manufactured to standard AS/NZS 1172.4

is onven busin is manufactured to standard AS/NZS 1172.4



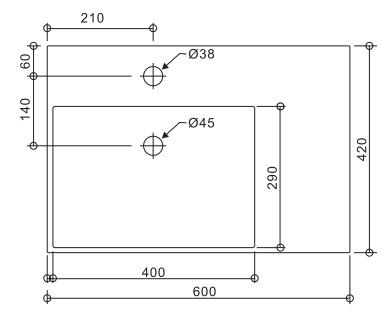

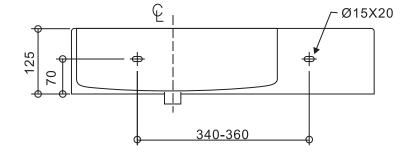

Dimensions in mm

Oliveri Solutions Pty Ltd ABN 12 007 551 886

51 Naweena Rd, Regency Park SA 5010 P 08 8348 6444 E sales@oliveri.com.au

Munich



Wall Hung Basin with Shelf (RH) MU006WH

CARE & MAINTENANCE

Avoid using abrasive or acid-based cleaning products.

WARRANTY

Installation Instructions

This basin is warranted to be free from manufacturing defects for a period of: 10 years replacement parts and 1 year labour.

Subject to the terms contained in the full warranty information available at https://oliveri.com.au/service-and-warranty, where a genuine manufacturing defect arises within the warranty period Oliveri will, at its election, repair the defect or replace the product.

This warranty does not cover against normal wear and will be voided if the product is misused or not installed in accordance with these instructions.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

SERVICE

If the product requires servicing, please contact your installer (preferably the one who installed it). If the plumber / installer is satisfied that the problem is not due to poor installation, contact Oliveri's nominated Warranty Service Agent for assistance on:

Ph: 08 8348 6444 (choose the after sales service and warranty option)

Email: warranty@oliveri.com.au

For full warranty information visit: https://oliveri.com.au/service-and-warranty

If a warranty service call finds that the product does not have a genuine manufacturing fault, our Warranty Service Agent reserves the right to pass on any call-out fee to the householder.





THIS BASIN MUST BE INSTALLED IN ACCORDANCE WITH AS/NZ 3500.2 AND LOCAL REGULATIONS. THIS BASIN MUST BE INSTALLED BY A LICENSED PLUMBER.

Before you begin

Check the product for damage, if the product is damaged return to the store of purchase. Check the product is complete with all components required to install. This product is to only be installed by a licensed plumber, and must be installed in accordance with these instructions, failing to do so will void warranty.

Basin installation with fixing kit

IMPORTANT

Provide suitable reinforcement behind finished wall for the basin fixing at the fixing height position. For timber stud walls, noggins and studs must be positioned at the required height to allow for the location of the basin fixing screw bolts.

- 1. Determine where on the wall the basin is to be installed and ensure the wall area is structurally supported.
- Mark fixing screw bolt hole positions on finished wall at the required height (refer product drawing). N.B. The supplied dimensional drawing is provided as a reference only.
- 3. Drill 10mm holes for wall fixing kit and screw bolts into a reinforced section of wall.
- 4. Place the basin in position and check to ensure the basin outlet does not interfere with fixtures, walls or waste connection pipe work.
- 5. Prior to fitting the basin it is recommended the tapware is assembled to the basin for ease of assembly.
- 6. Slide basin onto the protruding fixing bolts, Insert plastic bushes so the bush is separating the metal bolt from the basin surface.
- 7. Fit metal washers and fasten with supplied hex nuts. **N.B. DO NOT OVER TIGHTEN HEX NUTS as this may cause the basin to crack.**
- 8. Run a bead of neutral cure plumbing grade silicone around the edge of the basin. Allow silicone to set before proceeding with waste pipe installation.